






GED100 – HED100

3Gb/s, HD, SD embedded domain Dolby E to Dolby Digital (plus) transcoder with audio shuffler

A Synapse ® product





Quad speed MASTER	3 TRIPLE RATE GB/s, HD, SD
 Powered by LINUX	Upgradable to 3Gb/s
DESIGNED FOR  DOLBY. DIGITAL PLUS	DESIGNED FOR  DOLBY. E
	Embedded Metadata S2020

COPYRIGHT ©2012 AXON DIGITAL DESIGN BV

ALL RIGHTS RESERVED

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM WITHOUT THE PERMISSION OF AXON DIGITAL DESIGN BV.

Block schematic & I/O panel

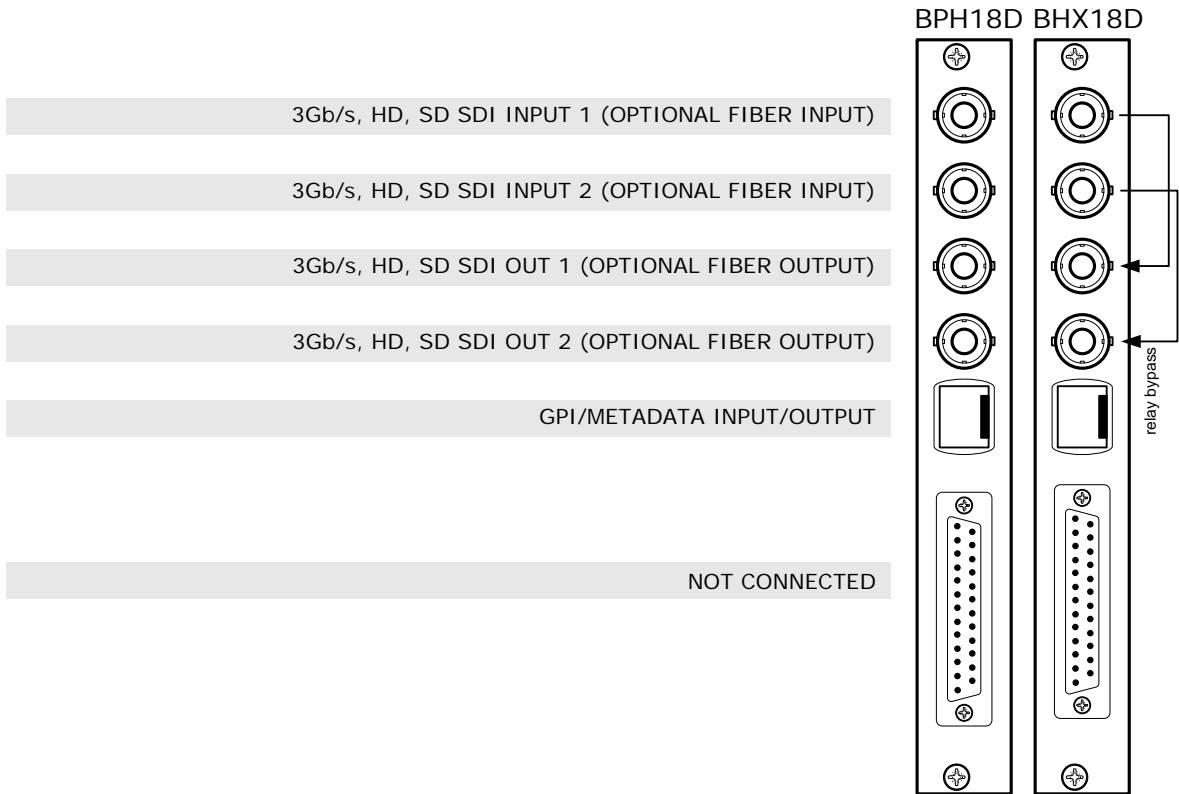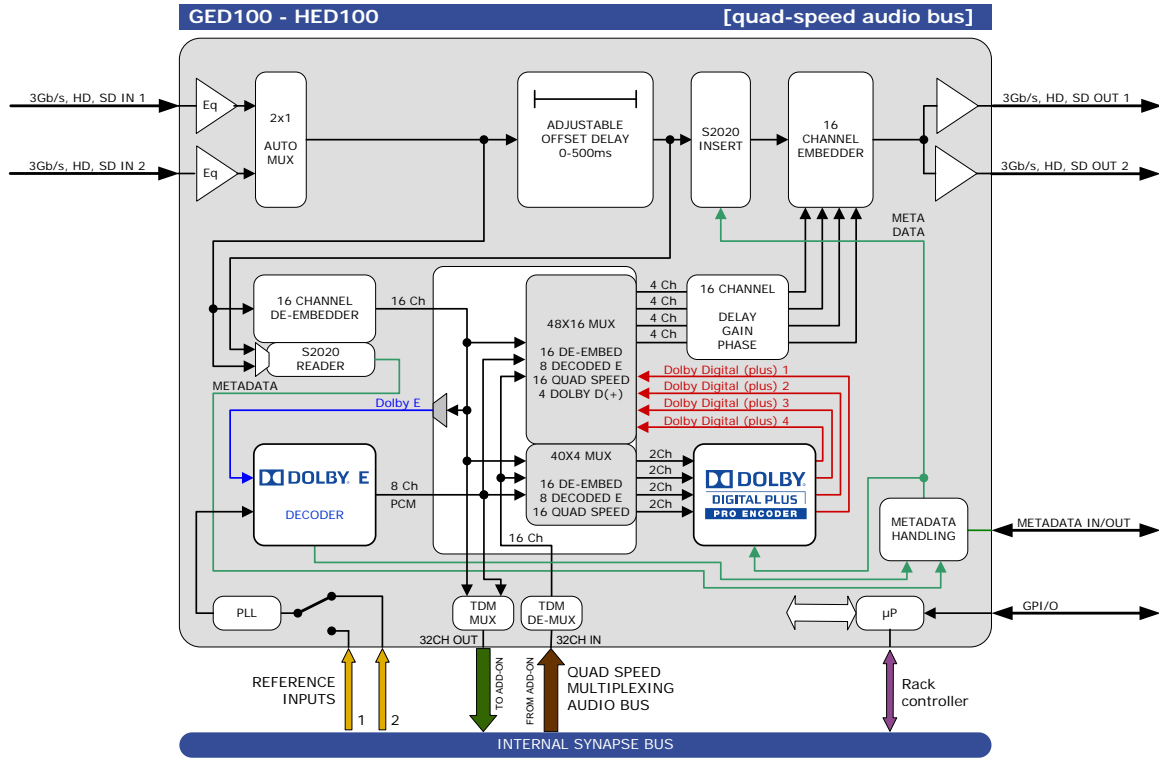

Features

The GED100 and HED100 are embedded domain Dolby E to Dolby Digital or Dolby Digital Plus transcoders.

Simultaneous encoding of 5.1+2.0 or 4 individual stereo channels (languages) to 4 Dolby Digital (Plus) 2.0 streams is possible.

The new Quad Speed audio bus allows for implementation of 'in between' audio processing. This means that we can stream the decoded Dolby E audio to a Quad Speed Audio ADD-ON card like the DLA44 or DLA42, process this audio and send it back to the G/HED100 for encoding into Dolby Digital or Dolby Digital plus.

The ADD-ON card does not need a connector panel and all audio routing is performed inside the Synapse frame by just placing these cards in adjacent slots.

The HED100 can be future upgraded to GED100. This allows for staged implementation of HD infrastructures and spread the cost over multiple budget years.

- Dolby E decoding (***no Dolby Digital Decoding***)
- Encoding of up to 4 times 2.0 Dolby Digital (Plus) outputs, or 5.1 Dolby Digital (Plus) + 2.0 Dolby Digital (Plus)
- Dolby Pro Logic II encoding on the 2.0 channel
- Downmix of 5.1 to 2.0
- S2020 metadata handling
- 2 SDI inputs (with auto switch on carrier loss, and switch back function)
- Compatible with the following input formats (auto selecting) (1080p only for GED):

▪ 1080p/59.94	▪ 720p/59.94
▪ 1080p/50	▪ 720p50
▪ 1080i/59.94	▪ 720p30
▪ 1080i/50	▪ 720p25
▪ 1080p/30	▪ 720p24
▪ 1080p25	▪ SD525
▪ 1080p(sf)/23.98	▪ SD625
▪ 1035i/59.94	
- Offset video delay adjustable between 0 and 1000ms
- Quad Speed Audio ADD-ON bus for bidirectional audio processing
- 2 SDI + embedded audio outputs
- 7 presets that configure all 16 input channels at once. controlled by GPI or ACP (Cortex)
- Append and overwrite modes
- Audio level and phase control
- Audio offset delay up to 5000 ms
- Silence detection with threshold (-100 to -20dBFS) and time control (1 to 255 sec)
- Transparent for ATC time code RP188, RP196, RP215
- Locks to Tri-level, Bi-level syncs or input
- Full control and status monitoring through the front panel of the SFR04/SFR08/SFR18 frame and the Ethernet port (ACP)
- Optional 1 or 2 fiber inputs, 1 or 2 fiber outputs or a fiber in and output (replacing 1 SDI in and output) on the I/O panel
- Optional relay bypass (BHX18D)

Caution: The E decoding latency is 4 frames

Complementary cards:

- DLA44, DLA43, DLA42, DLA41 and DIO88 (plus all future quad speed audio ADD-ON cards)

Applications

- 3Gb/s, HD and SD Dolby transcoding in transmission
- Preset based 16 channel audio/bitsream shuffling

Ordering information

Module:

- **GED100:** 3Gb/s, HD, SD embedded domain Dolby E decoder Dolby Digital (plus) encoder re-embedder
- **HED100:** HD, SD embedded domain Dolby E decoder Dolby Digital (plus) encoder re-embedder

Standard I/O:

- **BPH18D_GED100:** I/O panel for GED100 with (future use) balanced AES/EBU inputs

Relay bypass I/O:

- **BHX18D_GED100:** I/O panel for GED100 with (future use) balanced AES/EBU inputs with relay bypass

Fiber outputs* :

- **BPH18DT_FC/PC_GED100:** I/O panel for GED100 with (future use) balanced AES/EBU inputs with one fiber transmitter
- **BPH18DT2_FC/PC_GED100:** I/O panel for GED100 with (future use) balanced AES/EBU inputs with two fiber transmitters

Fiber inputs* :

- **BPH18DR_FC/PC_GED100:** I/O panel for GED100 with (future use) balanced AES/EBU inputs with one fiber receiver
- **BPH18DR2_FC/PC_GED100:** I/O panel for GED100 with (future use) balanced AES/EBU inputs with two fiber receiver

Fiber inputs and outputs* :

- **BPH18DTR_FC/PC_GED100:** I/O panel for GED100 with unbalanced AES/EBU inputs with balanced AES/EBU inputs with one fiber transmitter and receiver

* Ordering information fiber input and/or output modules:

- In case of HED100 replace GED100 by HED100
- In case of SC connector: replace FC/PC by SC.

Specifications

Serial Video Input

Standard	SD,HD and 3Gb/s SDI: SMPTE 292M, SMPTE 259M, SMPTE424
Number of Inputs	2
Connector	BNC
Equalization	Typical maximum equalized length of Belden 1694A cable: 90m at 2.97Gb/s, 120m at 1.485Gb/s, and 250m at 270Mb/s
Return Loss	> 15dB up to 1.5GHz

Serial Video Output

Number of Outputs	2
Connector	BNC
Signal Level	800mV nominal
DC Offset	0V \pm 0.5V
Rise/Fall Time	135ps nominal
Overshoot	< 10% of amplitude
Return Loss	> 15dB up to 1.5GHz (typ.) > 10dB up to 3GHz (typ.)
Wideband Jitter	< 0.2UI

Reference Input through RRC

Number of Inputs	2 on SFR18, 2 on SFR08 and 1 on SFR04
Tri-level	SMPTE274M, SMPTE296M 600 mVp-p nominal, 75 Ohms terminated through loop
Bi-level	PAL Black Burst ITU624-4/SMPTE318, Composite NTSC SMPTE 170M 1Vp-p nominal, 75 Ohms terminated through loop

Miscellaneous

Weight	Approx. 250g
Operating Temperature	0 °C to +50 °C
Dimensions	137 x 296 x 20 mm (HxLxD)

Electrical

Voltage	+24V to +30V
Power	<15 Watts